

BISTAR

TP7E54M
TP7E54M(H) **108-cell**

390 - 410W

10BB PERC
Q

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018

CE

12

25



10BB

2%

0.55%



2%



PID

PID
85 / 85% RH 192




IP68


	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
(Pmax/W)	390	291	395	294	400	298	405	302	410	306
(Vmpp/V)	30.65	28.6	30.85	28.8	31.05	29.0	31.24	29.2	31.43	29.3
(Impp/A)	12.73	10.18	12.81	10.23	12.89	10.30	12.97	10.36	13.05	10.42
(Voc/V)	36.50	34.4	36.75	34.6	37.00	34.8	37.25	35.1	37.50	35.3
(Isc/A)	13.61	10.97	13.69	11.04	13.78	11.11	13.86	11.17	13.94	11.24
(%)	20.00		20.20		20.50		20.70		21.00	

STC : 1000W/m², AM1.5, 25 O~+5W ± 3%
 NMOT() 800W/m² AM1.5 20 1m/s

	10BB
	108 (6*18)
	1722*1134*30mm (67.80*44.65*1.18)
	21.5kg (47.4lbs.)
	3.2mm
	IP68, 3
	4mm ² (IEC), 12AWG(UL) 300mm
	T01/LJQ-3-CSY/MC4/MC4-EVO2

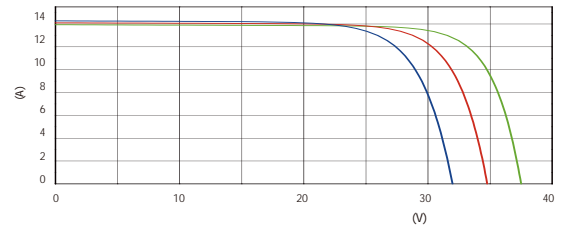

	1000V/1500V/DC
	-40°C~+85°C
	25A
	Class



	36	36(USA)
	936	828

