




BIPRO

120-cell

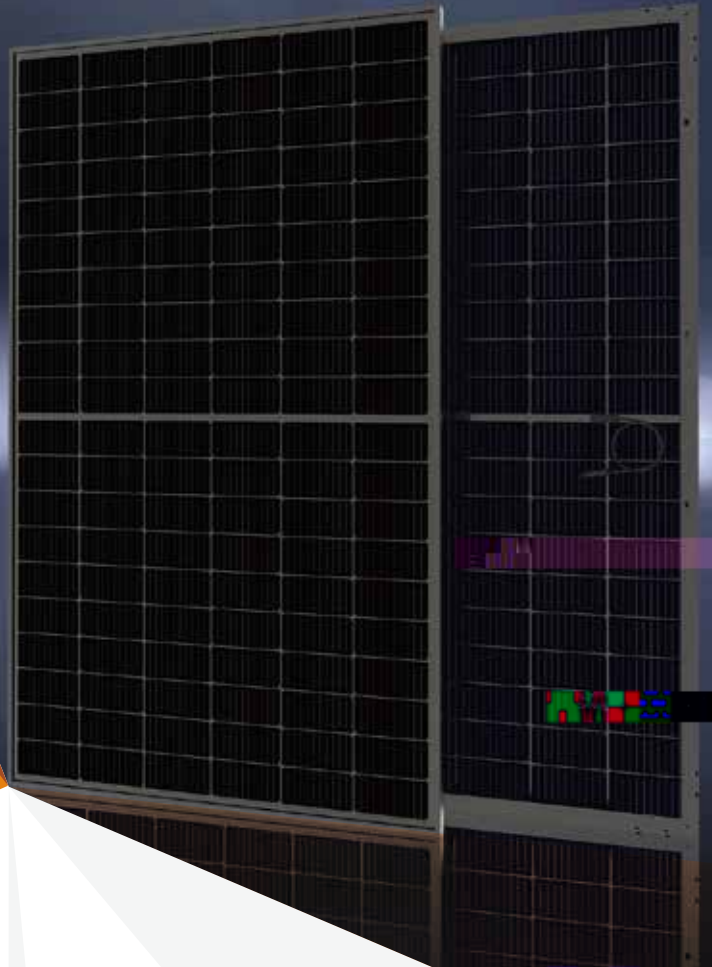

UL US LISTED

12

2



10BB Half-cut Cell Technology



Significantly Lower the Risk of Hot Spot



Lower LCOE



Excellent Anti-PID Performance




IP68 Junction Box

ELECTRICAL CHARACTERISTICS

: C. C :

MECHANICAL CHARACTERISTICS

I-V CURVE

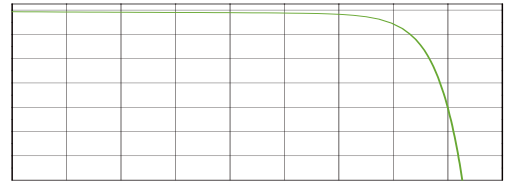

APPLICATION CONDITIONS

	II

TECHNICAL DRAWINGS

TEMPERATURE CHARACTERISTICS

PACKING CONFIGURATION



The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Suzhou Talesun Solar Technologies Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.