



BISTAR

TP8F54M
TP8F54M(H) **108-cell**

540 - 560W

12BB PERC



体系及产品认证


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



质量保证

12

25

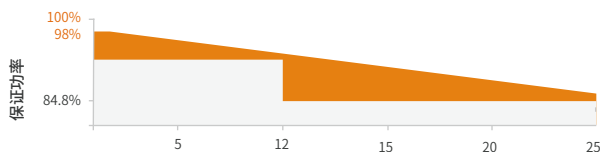

产品特性



12BB半片电池技术

2%

0.55%



显著降低热斑风险



更电度电成本

2%



优秀的抗PID性能

PID
85 / 85% RH 192



IP68接线盒

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT

	12BB
	108 (6*18)
	1961*1303*35mm (77.20*51.30*1.38)
	28.5kg (62.83lbs.)
	IP68, 3
	4mm ² (IEC), 12AWG(UL) 300mm
	T01/LJQ-3-CSY/MC4/MC4-EVO2

