




- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



12 30

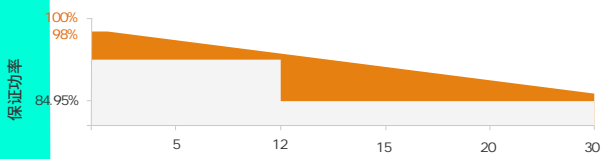

10BB

2%

0.45%



5% - 25%



PID

85 / 85% RH 192


PID



| | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT |
|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 395 | 294 | 400 | 298 | 405 | 302 | 410 | 306 | 415 | 310 |
| | 30.85 | 28.8 | 31.05 | 29.0 | 31.24 | 29.2 | 31.43 | 29.3 | 31.64 | 29.6 |
| | 12.81 | 10.23 | 12.89 | 10.30 | 12.97 | 10.36 | 13.05 | 10.42 | 13.13 | 10.48 |
| | 36.75 | 34.6 | 37.00 | 34.8 | 37.25 | 35.1 | 37.50 | 35.3 | 37.75 | 35.5 |
| | 13.69 | 11.04 | 13.78 | 11.11 | 13.86 | 11.17 | 13.94 | 11.24 | 14.02 | 11.30 |
| | 20.22 | | 20.48 | | 20.73 | | 21.00 | | 21.25 | |

| | 5% | 10% | 15% | 20% | 25% |
|--|-------|-------|-------|-------|-------|
| | 431 | 451 | 472 | 492 | 513 |
| | 31.43 | 31.43 | 31.43 | 31.43 | 31.43 |
| | 13.70 | 14.36 | 15.01 | 15.66 | 16.31 |
| | 37.50 | 37.50 | 37.50 | 37.50 | 37.50 |
| | 14.65 | 15.35 | 16.04 | 16.74 | 17.44 |

| | 10BB |
|--|--|
| | 108 (6*18) |
| | 1722*1134*30_ _ (67.80*44.65*1.18) |
| | 25.5] Y (56.22Te) |
| | 2.0_ _ |
| | 2.0_ _ |
| | IP68, 3 |
| | 4_ _ , (IEC), 12AI G(GL) 350_ _ (+), 250_ _ (-) |
| | F01/LJQ-3-CEK/MC4/MC4-EHO2 |

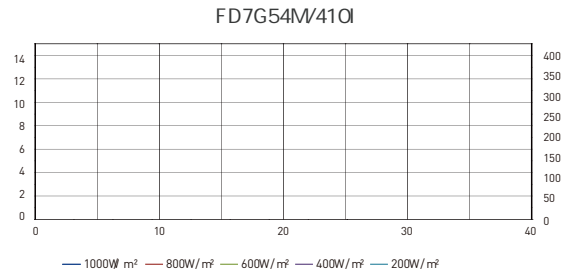

| | |
|--|--------------------|
| | 1500H/DC |
| | -40, Cp+85, C |
| | 30A |
| | C'See |
| | 5400PS 2400PS |
| | 70% f 5% |

75°C 50°C 25°C

| | | |
|--|-----|---------|
| | 36 | 36(GEA) |
| | 936 | 720 |