




TP7F60M  
TP7F60M(H) **120-cell**

440 - 460W

10BB Half-cut Mono Perc

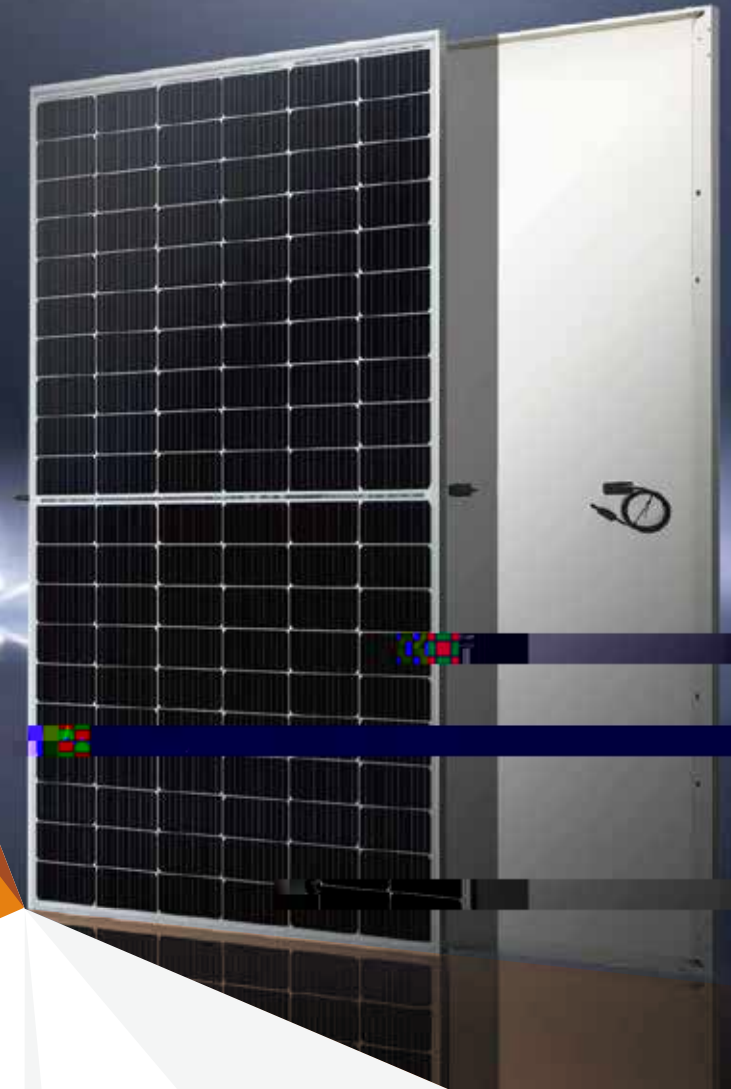

#### KEY FEATURES

#### SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems



CE

#### PERFORMANCE WARRANTY

12 Years  
Quality  
Assurance

2 Years  
Power Output  
Guarantee

Linear Performance Warranty

[www.talesun.com](http://www.talesun.com)

[marketing.hq@talesun.com](mailto:marketing.hq@talesun.com)

\* GL-EN-Version 2023.09.25

## ELECTRICAL CHARACTERISTICS

| Testing Condition             | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT |
|-------------------------------|-----|------|-----|------|-----|------|-----|------|-----|------|
| Maximum Power (Pmax/W)        |     |      |     |      |     |      |     |      |     |      |
| Operating Voltage (Vmpp/V)    |     |      |     |      |     |      |     |      |     |      |
| Operating Current (Impp/A)    |     |      |     |      |     |      |     |      |     |      |
| Open-Circuit Voltage (Voc/V)  |     |      |     |      |     |      |     |      |     |      |
| Short-Circuit Current (Isc/A) |     |      |     |      |     |      |     |      |     |      |
| Module Efficiency (%)         |     |      |     |      |     |      |     |      |     |      |

STC: Irradiance 1000W/m<sup>2</sup>, Spectra at AM1.5, Module Temperature 25 C. Power output tolerance: 0~+5W, Test uncertainty for Pmax: ±3%  
 NMOT: Irradiance 800W/m<sup>2</sup>, Spectra at AM1.5, Ambient Temperature 20 C, Wind speed 1m/s

## MECHANICAL CHARACTERISTICS

|                   |   |
|-------------------|---|
| Cell Type         | Monocrystalline Silicon (10Busbar)  |
| No. of Cells      | 120pcs in series (6*20)   |
| Module Dimensions | 1908*1134*35mm<br>(75.12*44.65*1.38inches)                                |
| Weight            | 24.3kg (53.6lbs.)   |
| Front Glass       |   |
| Frame             | Anodized Aluminium Alloy  |
| Junction Box      | IP68, 3 Bypass Diodes   |
| Output Cables     | 4mm <sup>2</sup> (IEC), 12AWG(UL)<br>300mm in Length or Customized Length |
| Connectors        | T01/LJQ-3-CSY/MC4/MC4-EVO2  |

## I-V CURVE

## APPLICATION CONDITIONS

|                         |                |
|-------------------------|----------------|
| Maximun System Voltage  | 1000V/1500V/DC |
| Operating Temperature   | -40°C~+85°C    |
| Maximun Series Fuse     | 25A            |
| Safety Protection Class | Class II       |
|                         |                |
|                         |                |

## TECHNICAL DRAWINGS

## TEMPERATURE CHARACTERISTICS

|  |  |
|--|--|
| Temperature Coefficient of Pmax            |  |
| Temperature Coefficient of Voc             |  |
| Temperature Coefficient of Isc             |  |
| Nominal Module Operating Temperature(NMOT) |  |

## PACKING CONFIGURATION

|                             |  |
|-----------------------------|--|
| Pieces Per Pallet           |  |
| Pieces Per Container(40'HQ) |  |



The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Suzhou Talesun Solar Technologies Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recensc