



BISTAR

TP7F72M
TP7F72M(H) **144-cell**

530 - 550W


10BB PERC



- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



12 25

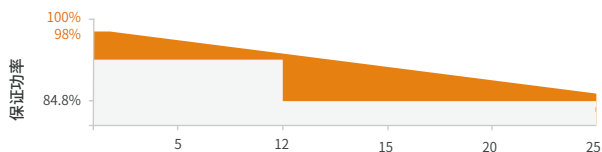

10BB

2%

0.55%



2%




PID
PID
85 /85% RH 192



IP68

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	530	395	535	398	540	402	545	406	550	410
	41.32	38.6	41.48	38.7	41.64	38.8	41.80	39.0	41.96	39.1
	12.83	10.24	12.90	10.30	12.97	10.36	13.04	10.41	13.11	10.47
	49.32	46.4	49.46	46.5	49.60	46.7	49.76	46.8	49.92	47.0
	13.72	11.06	13.79	11.12	13.86	11.17	13.93	11.23	14.00	11.28
	20.50		20.70		20.90		21.10		21.30	

	10BB
	144 (6*24)
	2278*1134*35mm (89.69*44.65*1.38)
	28kg (61.73lbs.)
	3.2mm
	IP68, 3
	4mm ² (IEC), 12AWG(UL) 350mm(+),250mm(-)
	T01/LJQ-3-CSY/MC4/MC4-EVO2

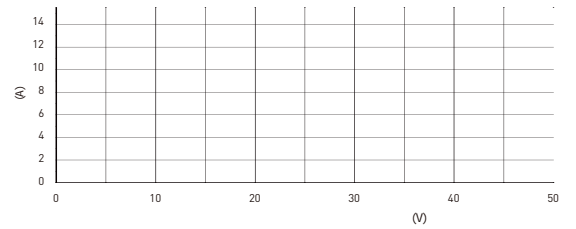

	1000V/1500V/DC
	-40°C~+85°C
	25A
	Class

	31	31(USA)
	620	620

